
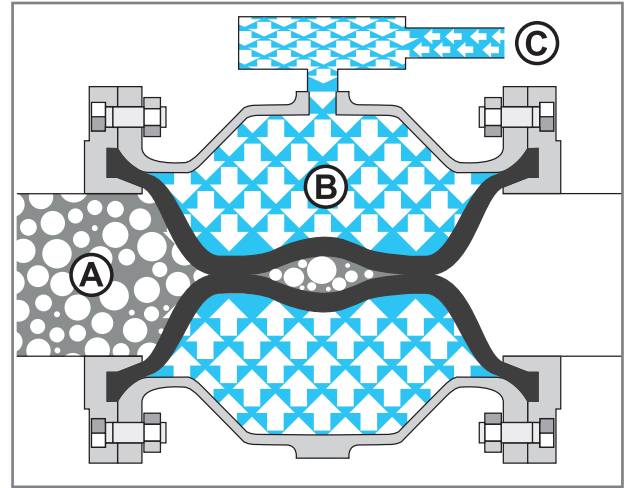


Optimalt styretryk

Optimum control pressure

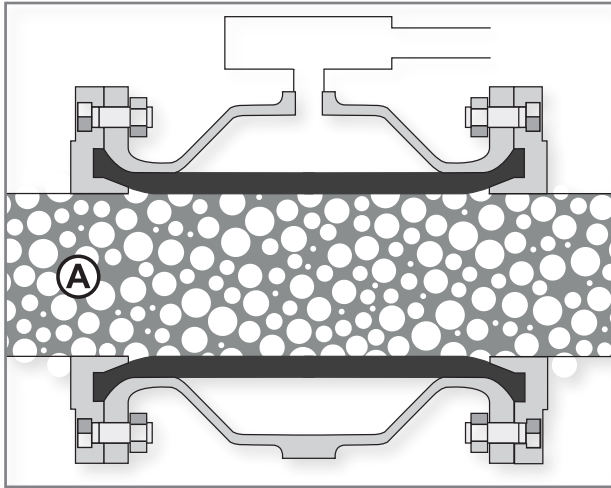

- Ⓐ Driftstryk (fødetryk)
- Ⓑ + Differenstryk
(Δp mellem styretryk og driftstryk)
- Ⓒ = optimalt styretryk, der skal indstilles
(lukketryk)

- Ⓐ Operating pressure (line pressure)
- Ⓑ + Differential pressure
(Δp between control pressure and working pressure)
- Ⓒ = Optimum control pressure to be set
(closing pressure)

Hvor mange bar lufttryk (optimalt styretryk) er der brug for, for at lukke slangeventilen?

How much compressed air (control pressure) is required to close the pinch valve?

OPTIMALT STYRETRYK =

Driftstryk + Differenstryk

- Vorgabe Kunde - se typeskilt
(se tekn. infoblad "slange materialer")

OPTIMUM CONTROL PRESSURE =

Operating pressure + Differential pressure

- Customer specification - see type plate
(techn. info sheet sleeve qualities)

Anvisning:

Slangeventilens maksimale styre-/driftstryk findes på typeskiltet hhv. i databladet!

Note:

Please refer to the type plate or article text for the maximum control / operating pressure of the pinch valve!